

Farenhyt



**SILENT
KNIGHT**

by Honeywell

Miscellaneous

STI Stopper® II and Weather Stopper® II

Covers for Manual Pull Stations

General

The Safety Technology International, Inc. Stopper® II cover for manual pull stations helps deter unwanted activation and is also an effective guard against physical damage. It has been proven by use in thousands of installations throughout the world, including schools, hospitals, hotels and stores. The Stopper® II has also been tested and approved by fire prevention and testing authorities.

Features

- Window made of clear and durable plastic.
- Optional warning horn powered by 9 VDC battery.
- Provides weatherproofing for outdoor pull stations when equipped with optional gasket (Weather Stopper II).
- Fits pull stations from 5-1/2" to 6-3/4".
- Unconditional lifetime guarantee against cover breakage and damage.
- ADA Compliant
- UL Listed


Applications

The Stopper® II can be used in almost any pull station environment.

Spacer Installation

(SURFACE MOUNT MODELS ONLY)

The spacer is used for surface-mounted or oversized manual stations. Longer screws are provided for use with tap-in anchors. Remove knock-out at top or bottom of spacer as necessary.

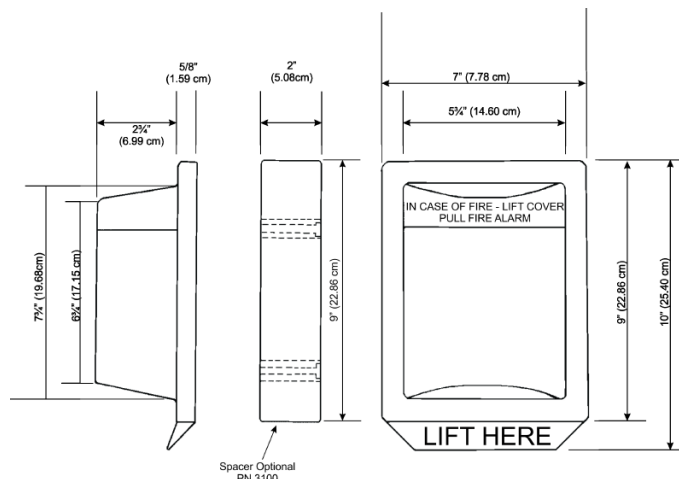

Agency Listings



Gasket Installation

(WEATHER STOPPER® II MODELS ONLY)


Installing Neoprene gaskets behind the spacer and/or Stopper® II frame will provide additional weatherproofing. A conduit gasket may be used to seal the top or bottom of the spacer.

Size Of Pull Station Accommodated


The Stopper® II and Weather Stopper® II can be installed over a flush-mounted station up to 5-1/2" wide and 6-3/4" high. However, the pull station's maximum dimensions will decrease as its depth (distance from the wall) increases, i.e.: a 3/4" deep pull station may be 5-1/2" wide x 6" high; a 1-5/8" deep pull station may be 5" wide x 6" high; a 2-3/8" deep pull station may be 4" wide x 5-3/4" high; a 2-3/4" deep pull station may be 3" wide x 5-1/2" high. See sections "Spacer Installation" and "Gasket Installation".

P/N 351532 Rev A

Copyright © 2010 Honeywell International Inc.

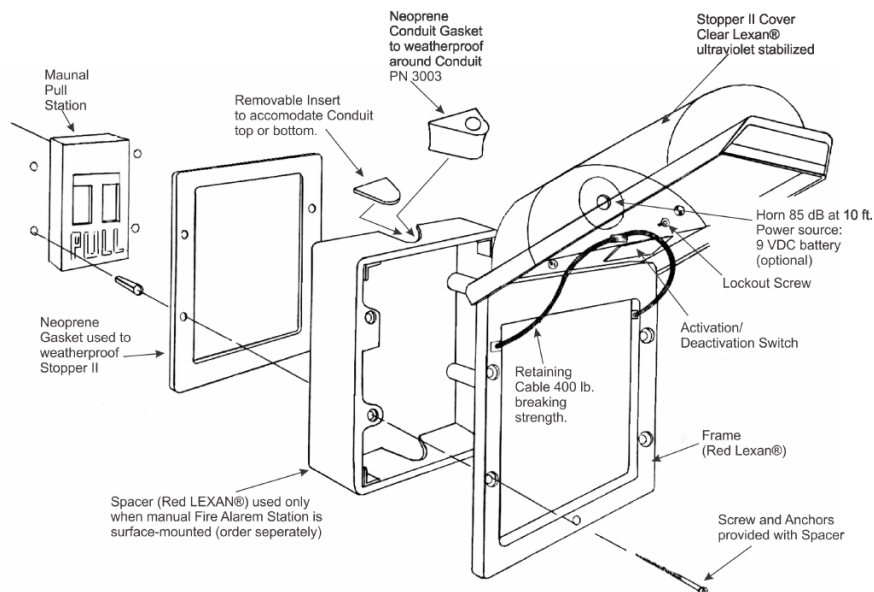

Weather Stopper® II

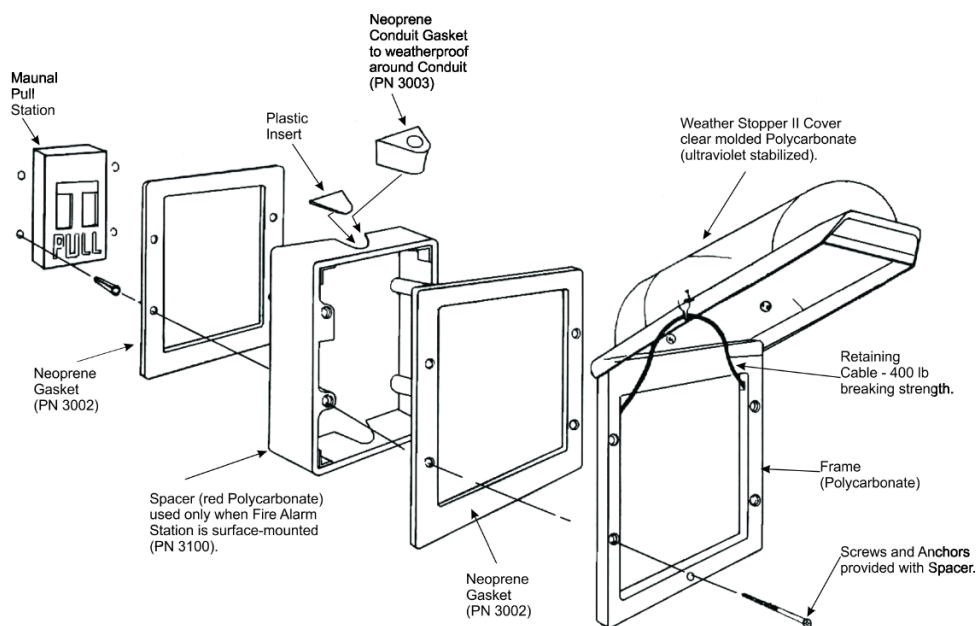

Stopper® II

Ordering Information

STI1100 Stopper® II, flush mount, with horn.

STI1130 Stopper® II, surface mount, with horn.

STI1200 Stopper® II, flush mount, without horn.

STI1230 Stopper® II, surface mount, without horn.

STI1250 Weather Stopper® II, flush mount.

STI3150 Weather Stopper® II, surface mount.

STI3002 Weather Gasket

STI3003 Conduit Gasket

STI3100 Conduit Spacer, surface mount



**SILENT
KNIGHT**

by Honeywell

This document is not intended to be used for installation purposes. We try to keep our product information up-to-date and accurate. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice. For more information, contact Silent Knight 12 Clintonville Road, Northford, CT 06472-1610 Phone: (800) 328-0103, Fax: (203) 484-7118.

www.farenhyt.com SpectrAlert® and System Sensor® are registered trademarks of Honeywell International Inc.