


Technical Specifications

VIP-824A IP Gateway FXO Port

- Power over Ethernet (PoE) 802.3af compliant
- RJ-45 for network connection
- 4 RJ-11 FXO
- 4 RJ-11 telephone failover connection
- Decode Caller ID signals
- Indoor use

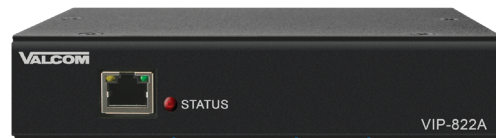

Network – Quad trunk port

Description:

The VIP-824A IP Gateway FXO Port allows most loop start station ports to be connected to a managed IP-based LAN/WAN. SIP connectivity allows the VIP-824A to act as a gateway device between a SIP telephone system and other Valcom paging systems.

SPECIFICATIONS

AUDIO INPUT

Input impedance: 600 Ohms

Input level: -10 dBm nominal

AUDIO OUTPUT

Output impedance: 600 Ohms

Output level: -10 dBm nominal

POWER REQUIREMENTS

Voltage: 24 Vdc

Current: 325 mA

Via 802.3af PoE Ethernet Switch: Class 3

AUDIO CODECS

G.711 u-law, others

NETWORK

10/100 Mbps Ethernet port

Manual or Dynamic Host Configuration Protocol (DHCP) IP address setup

Time and date synchronization using NTP

ENVIRONMENT

Temperature: 32 to 104 °F (0 to +40 °C)

Humidity: 0 to 85% non-precipitating

HOUSING AND FINISH

Steel with black powder coated finish

DIMENSIONS AND WEIGHT

1.75in H x 6.75in W x 9.50in D22

(4.45cm x 17.15cm x 24.13cm)

Weight: 1.75lbs (0.79kg)

Shipping Weight: 4.45lbs (2.60kg)

MOUNTING

Table placement, wall or rack mounting

2022 Rev. 1.9.6



SALES@VALCOM.COM

800.825.2661

VALCOM.COM

Technical Specifications

ARCHITECTS AND ENGINEERS

The Quad Network Trunk (FXO) Port, model VIP-824A, shall allow most loop start terminal devices to be connected to a managed IP-based LAN/WAN. SIP connectivity shall allow the VIP-824A to act as a gateway device between a SIP telephone system and other Valcom paging systems.

The VIP-824A Quad Network Trunk (FXO) Port shall be powered via a Power over Ethernet (PoE) switch meeting the 802.3af specification. All setup and configuration of the VIP-824A shall be via the Valcom IP Solutions Setup Tool.

The VIP-824A Quad Network Trunk (FXO) Port shall provide an audio input impedance of 600 Ohms. Input level shall be -10 dBm nominal. VIP-824A shall provide an output impedance of 600 Ohm. Output level shall be -10 dBm nominal.

The VIP-824A Quad Network Trunk (FXO) Port shall be constructed of steel with a black powder coated finish.

The VIP-824A Quad Network Trunk (FXO) Port shall be designed for table placement, or wall mounting. Provided with the VIP-824A shall be four rubber pads for table placement. Two mounting brackets and hardware shall be provided to secure the VIP-824A to the wall. The VIP-824A shall include two mounting brackets for mounting in a 1U rack slot.

Maximum dimensions shall be: 1.75in H x 6.75in W x 9.50in D (4.45cm x 17.15cm x 24.13cm). Weight shall be approximately: 1.75lbs (0.79kg).

Warranty information may be found on our website at www.valcom.com/warranty.